




120203X-WX-X

EXHAUST PROBE WITH COMPRESSION FITTING

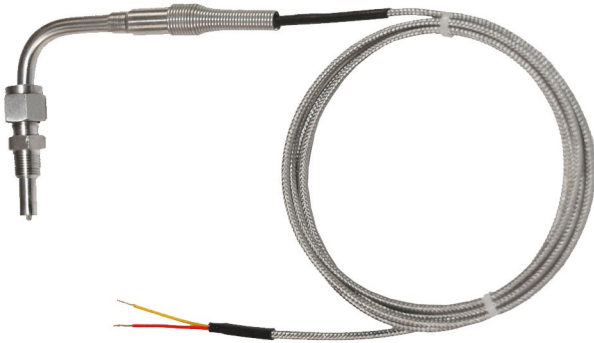

FEATURES

- Type "K" .188" (3/16") Sensor O.D. EGT probe with an adjustable depth compression fitting.
- The compression fitting included is 1/8" NPT stainless steel fitting.
- Fast response times (250+ milliseconds) and consistent stable readings.
- Uses stainless steel overbraid cable with FEP insulation.
- Capable of withstanding extreme vibration and temperatures. Blaze probes are made with Inconel 600 sheathing able to withstand temperatures of 2200°+F.
- Racetrack tested, approved, and used by professional race teams.
- Hand made in the U.S.A.

PART NUMBER	JUNCTION TYPE	WIRE LENGTH
120203A-W6	EXPOSED	6 FEET
120203A-W10	EXPOSED	10 FEET
120203B-W6	UNGROUNDED	6 FEET
120203B-W10	UNGROUNDED	10 FEET

Add "MP" to the end of part number for Mini-Plug Connection



SPECIFICATIONS

Specification/ Model	120203A-W6	120203A-W10	120203B-W6	120203B-W10
Sensor Type	Type K (Chromel / Alumel) Inconel 600			
Temp. Range	32°F ~ 2200°F			
Sensor O.D.	.188" (3/16") Diameter			
Junction Type	Exposed / Ungrounded			
Bend	90°			
"A" Dimension	3"			
"AA" Dimension	1"			
Wire	FEP (with SST Overbraid)			
Wire Length	72" (6 feet) / 120" (10 feet)			
Hardware	1/8" SST Compression Fitting			
Connection	Mini-Plug , Stripped Leads			

