


# MODEL - FB002-TRI

## BREWERY AND TANK RTD BEVERAGE PROBE / with TRI-CLAMP

| PART NUMBER   | "A" DIMENSION |
|---------------|---------------|
| FB002-TRI-2.5 | 2.5"          |
| FB002-TRI-4   | 4"            |
| FB002-TRI-6   | 6"            |
| FB002-TRI-9   | 9"            |
| FB002-TRI-9.5 | 9.5"          |
| FB002-TRI-12  | 12"           |

**"A"**

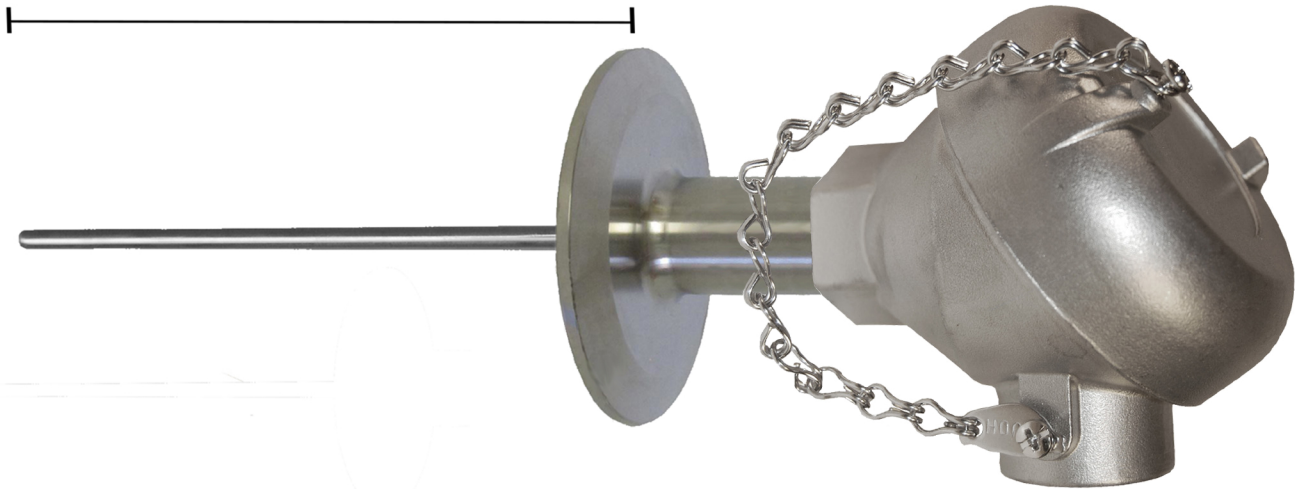

### SPECIFICATIONS


|                      |                                       |
|----------------------|---------------------------------------|
| Specification/ Model | FB002-TRI                             |
| Element              | 100 Ohm Pt/385                        |
| Temp. Range          | Class A: -58°F ~ 572°F 0.06% Accuracy |
| RTD Styles           | NPT Nipple & SST Housing (Industrial) |
| Sensor O.D.          | .250 (1/4") Diameter                  |
| Wire Leads           | 3-Wire                                |
| "A" Dimension        | 2.5", 4", 6", 9", 9.5" or 12"         |
| Connection Head      | Stainless Steel                       |
| Hardware             | Tri-Clamp                             |

# MODEL - FB1002-TRI

## BREWERY AND TANK RTD BEVERAGE PROBE / with TRI-CLAMP

| PART NUMBER    | "A" DIMENSION |
|----------------|---------------|
| FB1002-TRI-2.5 | 2.5"          |
| FB1002-TRI-4   | 4"            |
| FB1002-TRI-6   | 6"            |
| FB1002-TRI-9   | 9"            |
| FB1002-TRI-9.5 | 9.5"          |
| FB1002-TRI-12  | 12"           |

**"A"**

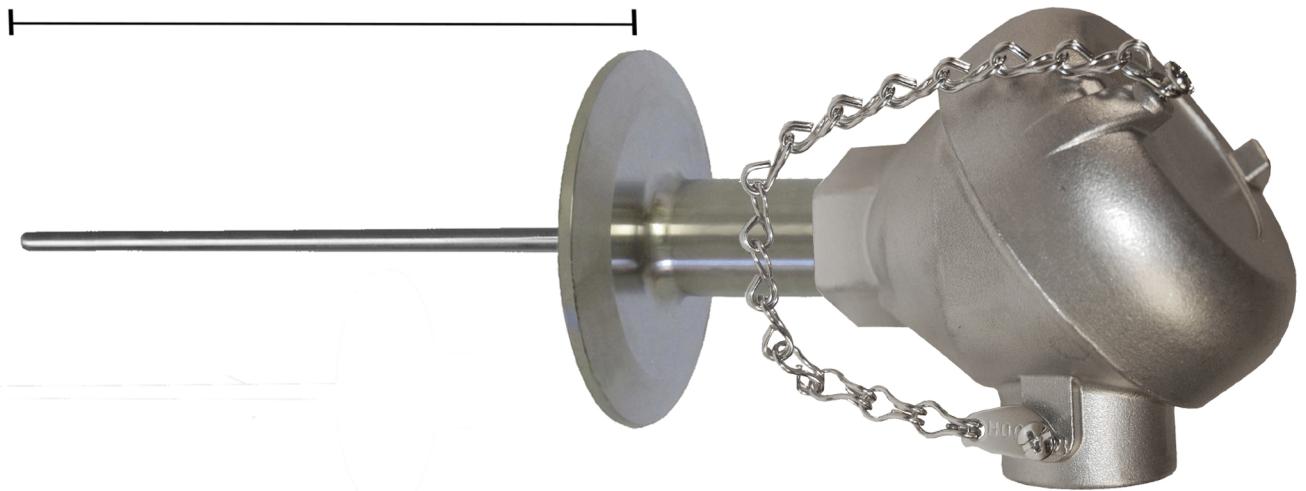

### SPECIFICATIONS

|                      |                                       |
|----------------------|---------------------------------------|
| Specification/ Model | FB1002-TRI                            |
| Element              | 1000 Ohm Pt/385                       |
| Temp. Range          | Class A: -58°F ~ 572°F 0.06% Accuracy |
| RTD Styles           | NPT Nipple & SST Housing (Industrial) |
| Sensor O.D.          | .250 (1/4") Diameter                  |
| Wire Leads           | 3-Wire                                |
| "A" Dimension        | 2.5", 4", 6", 9", 9.5" or 12"         |
| Connection Head      | Stainless Steel                       |
| Hardware             | Tri-Clamp                             |