


MODEL - HC001EX

EXPLOSION PROOF ATEX RTD PROBE

PART NUMBER	"A" DIMENSION
HC001EX-2.5	2.5"
HC001EX-4	4"
HC001EX-6	6"
HC001EX-9	9"
HC001EX-9.5	9.5"
HC001EX-12	12"

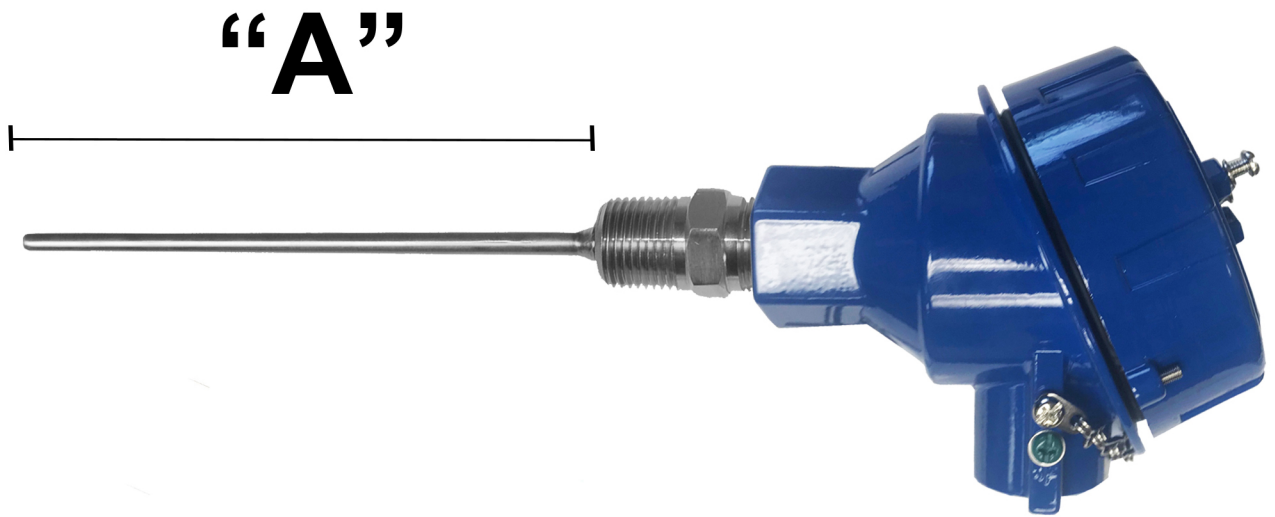

SPECIFICATIONS

Specification/ Model	HC001EX	
Element	100 Ohm Pt/385	
Temp. Range	Class A: -58°F ~ 572°F 0.06% Accuracy Class B: -94°F ~ 932°F 0.12% Accuracy	
RTD Styles	NPT Welded Nipple & Aluminum Housing (Industrial)	
Sensor O.D.	.250 (1/4") Diameter	
Wire Leads	3-Wire	
"A" Dimension	2.5", 4", 6", 9", 9.5" or 12"	
Connection Head	Aluminum Housing Explosion Proof	ATEX : EX d IIC T6 IP68 ; CE 0086 ; EX II 2 GD Ex tD A21 T100 °C IP68 BSi 07ATEX1532458U

MODEL - HC1001EX

EXPLOSION PROOF ATEX RTD PROBE

PART NUMBER	"A" DIMENSION
HC1001EX-2.5	2.5"
HC1001EX-4	4"
HC1001EX-6	6"
HC1001EX-9	9"
HC1001EX-9.5	9.5"
HC1001EX-12	12"



SPECIFICATIONS

Specification/ Model	HC1001EX	
Element	1000 Ohm Pt/385	
Temp. Range	Class A: -58°F ~ 572°F 0.06% Accuracy Class B: -94°F ~ 932°F 0.12% Accuracy	
RTD Styles	NPT Welded Nipple & Aluminum Housing (Industrial)	
Sensor O.D.	.250 (1/4") Diameter	
Wire Leads	3-Wire	
"A" Dimension	2.5", 4", 6", 9", 9.5" or 12"	
Connection Head	Aluminum Housing Explosion Proof	ATEX : EX d IIC T6 IP68 ; CE 0086 ; EX II 2 GD Ex tD A21 T100 °C IP68 BSi 07ATEX1532458U