


MULTIPURPOSE FLEX-WIRE PROBE


WITH TEFLON™ INSULATION AND STRIPPED LEADS OR MINI-PLUG

MODEL # F0424-XX-X

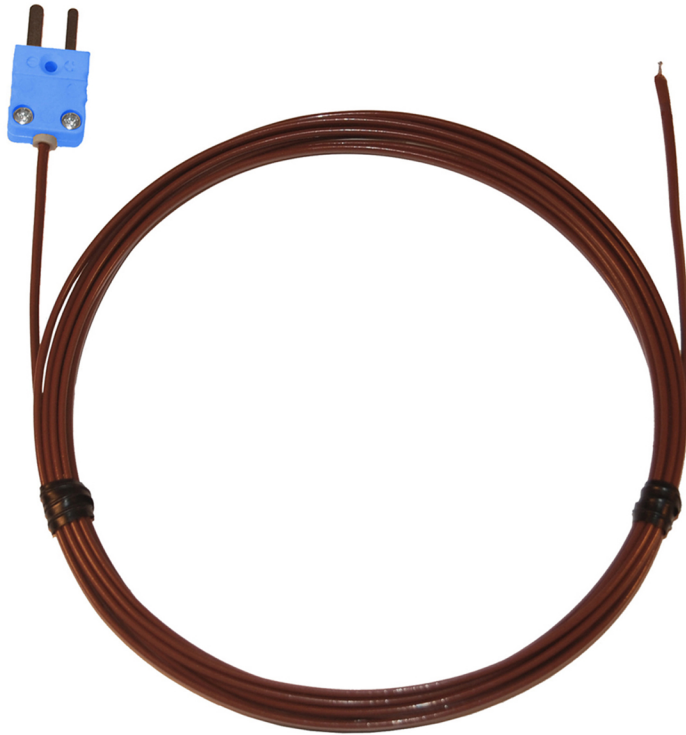

PART NUMBER	"A" DIMENSION	TERMINAL
F0424-SX-5	5'	Stripped Leads
F0424-SX-10	10'	Stripped Leads
F0424-SX-20	20'	Stripped Leads
F0424-MX-5	5'	Mini-Plug
F0424-MX-10	10'	Mini-Plug
F0424-MX-20	20'	Mini-Plug

Replace "X" in table with Thermocouple Type J, K, or T based on selection.

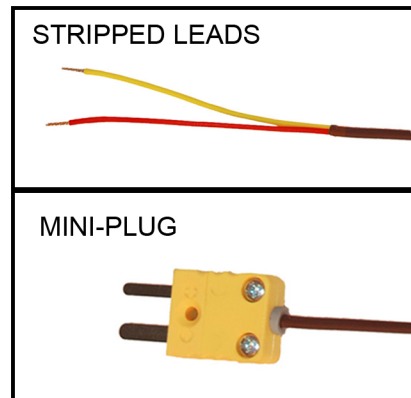

SPECIFICATIONS

Specification/ Model	F0424-K	F0424-J	F0424-T
Sensor Type	Type K (Chromel/Alumel), Type J (Iron/Constantan), Type T (Copper/Constantan)		
Temp. Range	Up to 400°F		
Wire Gauge	24 AWG		
Junction Type	Exposed		
Wire	Teflon™		
Wire Length	5' - 10' - 20'		
Terminal	Stripped Leads	Mini Plug	